

## Full Data Module

# 7794A AES-IntelliPro™ Fire for 2.0

### Technical Specifications

- Transmits full data to AES receiver using Contact ID or Pulse formats
- Formats Supported: Contact ID, Pulse 3+1, Pulse 4+1, Pulse 4+2

### DIMENSIONS

2.8 in x 5.0 in (7.1 cm x 12.7 cm)

### WEIGHT

0.2 lb (0.09 kg)

### I/O CONNECTIONS

- AES subscriber with power
- POTS incoming phone line
- Phone output from alarm panel
- Trouble output (form C relay)

### POWER REQUIREMENTS

12 VDC nominal, primary and backup power provided by the AES RF Transceiver Unit

### HOW TO ORDER

#### Models & Descriptions:


**7794A** - AES-IntelliPro Fire for 2.0

**7707P-88-ULP** - 8 Zone Fire Subscriber with AES-IntelliPro & integrated onboard Local Annunciator

**7707P-88-ULP-M** - 8 Zone Fire Subscriber with AES-IntelliPro & Multiple Communication Technologies (MCT)

**7707P-44-ULP** - 4 Zone Fire Subscriber with AES-IntelliPro & integrated onboard Local Annunciator

**7707P-44-ULP-M** - 4 Zone Fire Subscriber with AES-IntelliPro & MCT

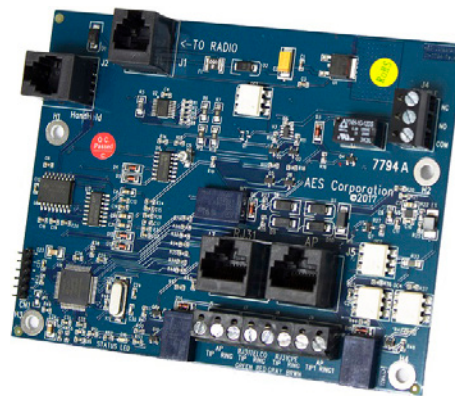

## Features

- Commercial fire alarm applications with or without phone lines
- Transmits full alarm data from any Contact ID or Pulse format fire alarm panel
- Primary or back-up communications
- Universal wireless alarm transmitter supports most manufacturers' panels
- Easy to install in IntelliNet 2.0 Fire subscriber
- Easy to program using smartphone, tablet, or PC
- Option to monitor telephone lines
- Transmits full data to AES receiver using Contact ID or Pulse formats
- Formats Supported: Contact ID, Pulse 3+1, Pulse 4+1, Pulse 4+2

The 7794A AES-IntelliPro Fire is an add-on module for IntelliNet 2.0 subscribers that enables transmission of full alarm zone data from an alarm panel to a central station over an established AES mesh radio network.


AES subscribers with AES-IntelliPro Fire can operate in applications with or without a phone line providing full emulation of the phone line for the alarm panel communicator. AES-IntelliPro Fire supports most popular alarm communication protocols including Contact ID and Pulse.

## Easy Installation

AES-IntelliPro Fire easily installs in the IntelliNet 2.0 subscriber housing and is powered from the transceiver module, requiring no additional power connections. 2.0 Fire subscribers can be ordered with AES-IntelliPro installed. AES-IntelliPro Fire is easy to program using a smartphone, tablet, or PC.



## Private Wireless Mesh Network

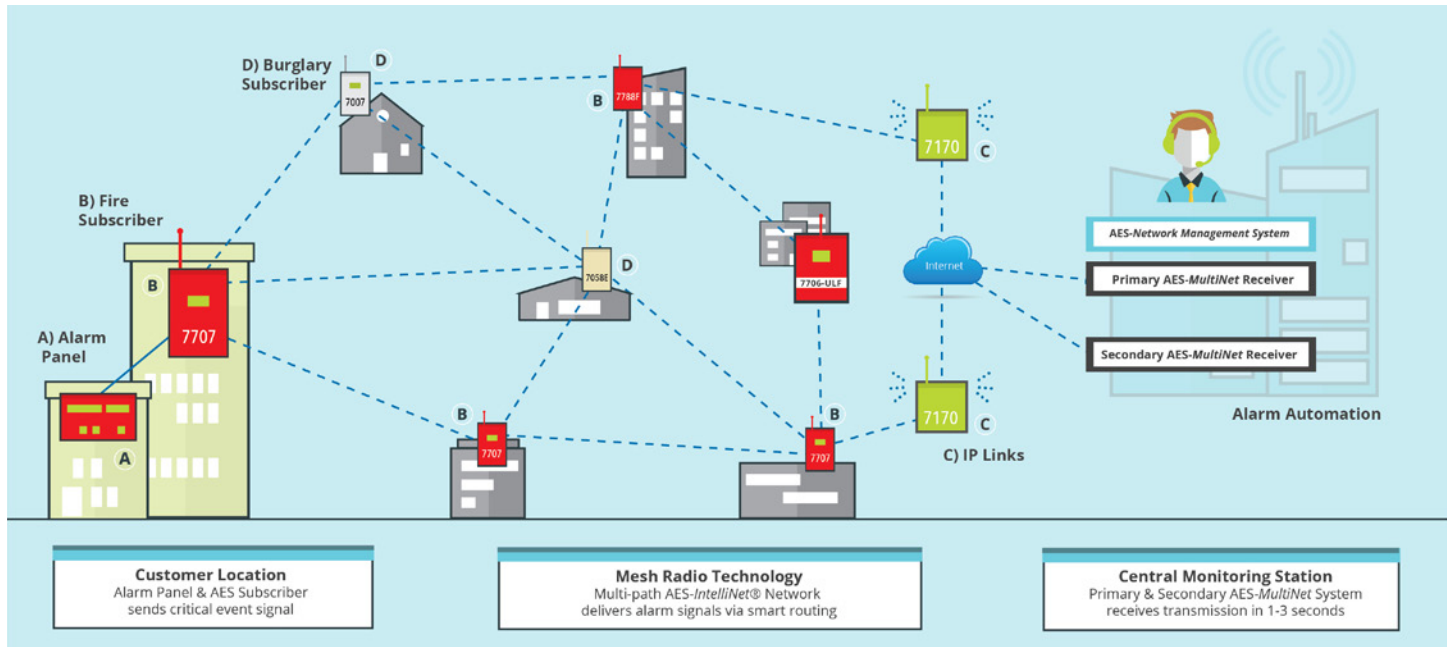

## About AES Corporation

Established in 1974, AES Corporation empowers companies to grow profitable alarm monitoring businesses, and government agencies to enhance security anywhere in the world. By providing the industry's only patented operator-owned and controlled private wireless mesh networks, AES ensures superior reliability, low TCO and optimal RMR while reducing dependence on service provider infrastructures. The company's flagship AES-IntelliNet systems are deployed in over a half million locations worldwide.

For more information, go to [www.aes-corp.com](http://www.aes-corp.com) or call **(800) 237-6387** or contact us at [sales@aes-corp.com](mailto:sales@aes-corp.com)